

# МОЩНЫЙ СВЕТОДИОД ARPL-25W-TFA-1919-90


## FEATURES

- 2700K, CRI90, 130–140 lm/W
- For indoor general lighting: spotlights, track lights, downlights
- For Industrial lighting: floodlight, high bay light, streetlight
- Low thermal resistance
- RoHS and REACH compliant

## SUPERIORITY


- High brightness and light efficiency.
- High color saturation.
- Easy to use with solar and wind energy saving systems.
- Enhanced optical control.
- Greatly reduce the thermal resistance of the light source, improve the weather resistance quality of the light source.
- Reduce the cost of use.
- Reduce maintenance costs.
- No environmental disposal issues.

## MECHANICAL DIMENSION

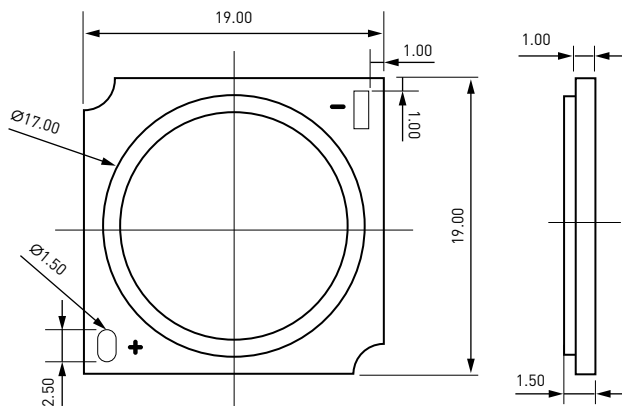

Notes:

1. All dimension tolerance is  $\pm 0.2\text{mm}$  unless otherwise noted.

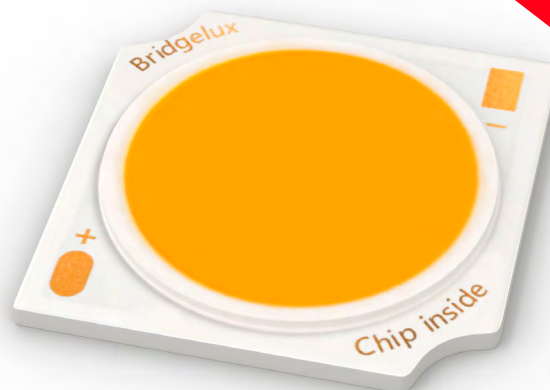

## ABSOLUTE MAXIMUM RATINGS

| Item                  | Symb.     | Min.                           | Typ | Max. | Unit      |
|-----------------------|-----------|--------------------------------|-----|------|-----------|
| Power                 | P         | -                              | 25  | 30   | W         |
| Forward Voltage       | VF        | 33                             | 35  | 37   | V         |
| Forward Current       | $I_F$     | -                              | 670 | 800  | mA        |
| Operating Temperature | TC        | -40                            | -   | 85   | °C        |
| Junction Temperature  | $T_J$     | -                              | -   | 125  | °C        |
| Storage Temperature   | $T_{STG}$ | -40                            | -   | 105  | °C        |
| ESD Sensitivity       | ESD       | -                              | -   | 2000 | V         |
| Reverse Voltage       | VR        | Reverse testing is not allowed |     |      | /         |
| Reverse Current       | IR        |                                |     |      | 5 $\mu$ A |
| Soldering Temperature | $T_{SLD}$ | 350 °C/3–5sec                  |     |      | °C/S      |


Max power and positive current mean the maximum setting value of the bottom temperature of led light source by using the appropriate heat sink.  
Connection error and off-limits voltage may damage LED chip.

## ELECTRO-OPTICAL CHARACTERISTICS AT $T_J=25\text{ }^\circ\text{C}$

| Product  | RA        | CCT         | Luminous Flux<br>(lm) 670mA | Efficacy<br>(lm/W)<br>670mA | Voltage<br>(V)<br>VF670mA | Part Number                        |
|--|-----------|-------------|-----------------------------|-----------------------------|---------------------------|------------------------------------|
| <b>ARPL-25W-TFA-1919-<br/>Warm2700-90<br/>(36v, 670mA)</b> | <b>90</b> | <b>2700</b> | <b>3160–3400</b>            | <b>130–140</b>              | <b>33–37</b>              | <b>TP1-1917B-<br/>1205P5-H27A0</b> |





Testing environment temperature 25 °C, and CCT and voltage will be changed if tested in different current and environment temperature.  
Tolerance among different testing machine: Voltage:  $\pm 0.1\text{V}$ , Lumen  $\pm 5\%$ , CRI  $\pm 2$ , Color coordinate  $\pm 0.005$ .

# THE REFERENCE MAP COLOR AREA


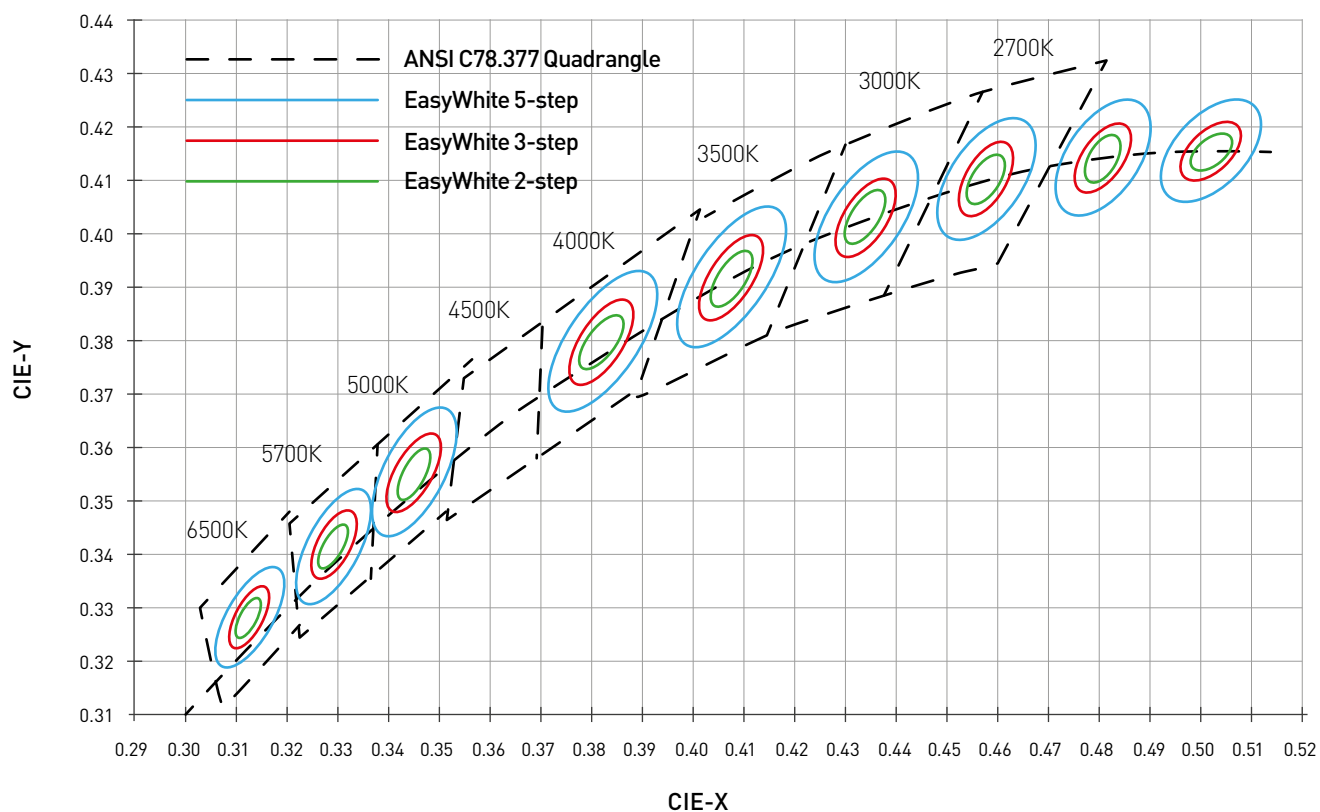


| Nominal CCT | Center Point |        | MAJOR AXIS (a , b) |                  |                 | Ellipse Rotation |
|-------------|--------------|--------|--------------------|------------------|-----------------|------------------|
|             | X            | Y      | 2-Step             | 3-Step           | 5-Step          |                  |
| 2700 K      | 0.4578       | 0.4101 | (0.0054, 0.0028)   | (0.0081, 0.0042) | (0.0135, 0.007) | 53.7             |


# CHARACTERISTIC CURVES

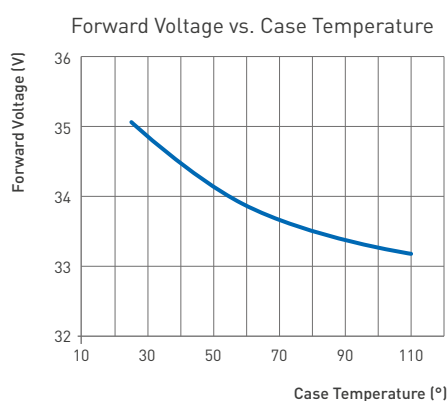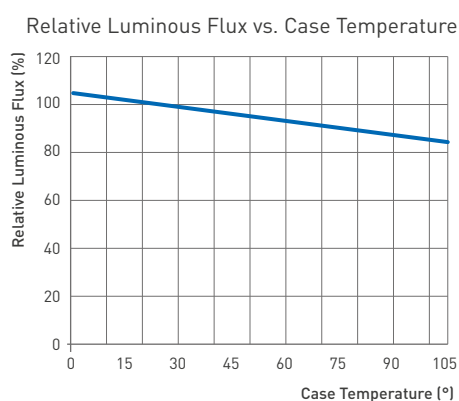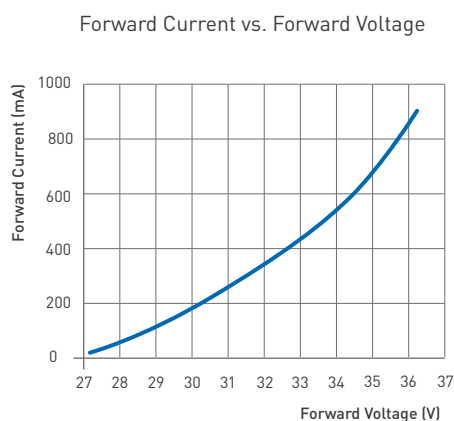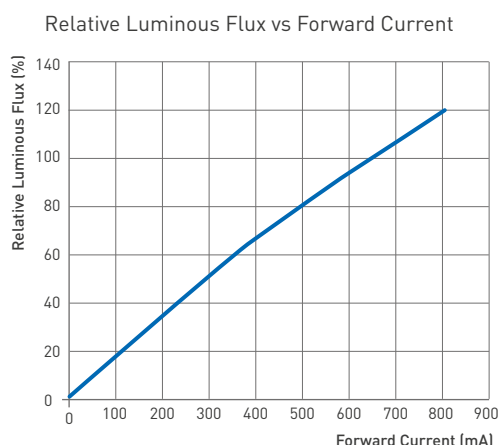

# OPTICAL CURVES

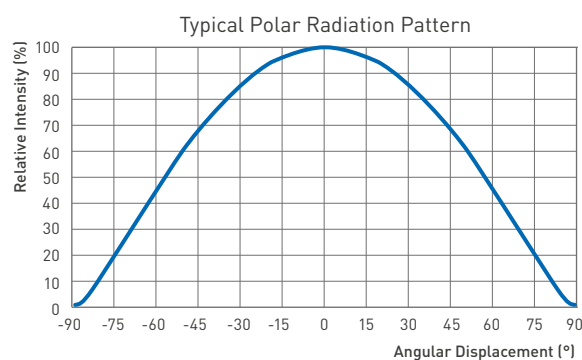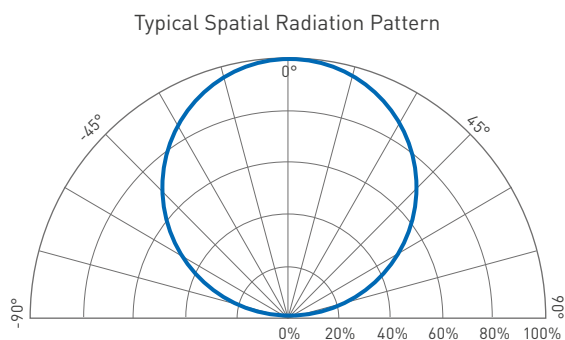

Typical viewing angle is 120°. The viewing angle is defined as the off axis angle from the center line where intensity is 1/2 of the peak value.

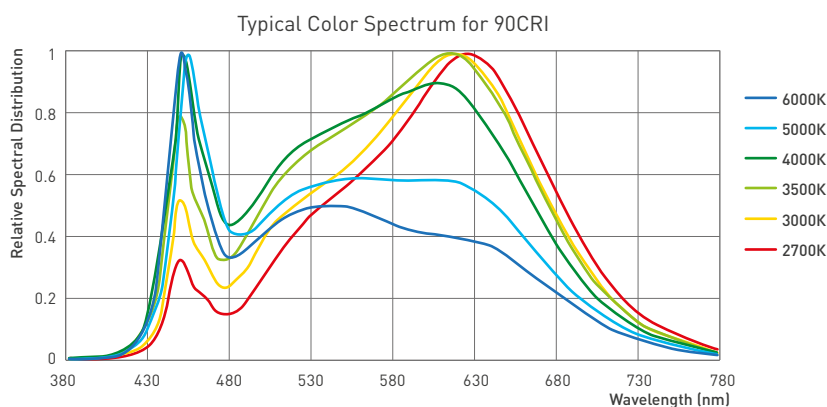

1. Color spectra measured at nominal current for  $T_j = T_c = 25^\circ\text{C}$ .
2. Color spectra shown is 2700K and 6000K with CRI90.

## RELIABILITY TEST

| Test Item                              | REF. Standard        | Test condition  | Sample quantity | Failure quantity |
|--|----------------------|---|-----------------|------------------|
| Thermal Shock                          | <b>JESD22-A104E</b>  | <b>-40 °C (15min) ~ 120 °C (15min),<br/>200 cycles</b>                        | <b>22</b>       | <b>0</b>         |
| High Temperature Storage               | <b>JESD22-A103D</b>  | <b>Ta=100 °C, 1000h</b>   | <b>22</b>       | <b>0</b>         |
| Low Temperature Storage                | <b>JESD22-A119</b>   | <b>Ta=-40 °C, 1000h</b>   | <b>22</b>       | <b>0</b>         |
| Temperature, High Humidity, Aging Test | <b>JESD22-A101C</b>  | <b>Ta=85 °C, RH&gt;=85%, IF=670mA<br/>1000h</b>                               | <b>22</b>       | <b>0</b>         |
| High-temperature operation             | <b>IES LM80-2015</b> | <b>Ta=105 °C, IF=670mA<br/>1000h</b>  | <b>22</b>       | <b>0</b>         |
| Low temperature operation              | <b>JESD22-A108D</b>  | <b>T=40 °C, IF=670mA<br/>1000h</b>  | <b>22</b>       | <b>0</b>         |
| Moisture/Reflow Sensitivity Test       | <b>J-STD-020E</b>    | <b>Precondition:<br/>60 °C, 60%RH, 168H<br/>Tstd=260 °C. 10sec. 3 Reflows</b> | <b>22</b>       | <b>0</b>         |