

## **Мощный светодиод ARPL-20W-ЕРА-3040-WW (700mA)**

### **Features:**


- More energy efficient than incandescent and most halogen lamps
- low voltage operation
- Instant light
- Long operating life
- Anti UV



### **Applications:**


- Indoor lighting:  
spot light, ceiling light, bulb.....
- Architectural and landscape lighting:  
down light, wall lamp, garden light
- Roadway lighting:  
Street light, garden light, tunnel light
- Display lighting:

## ■ Package Dimensions

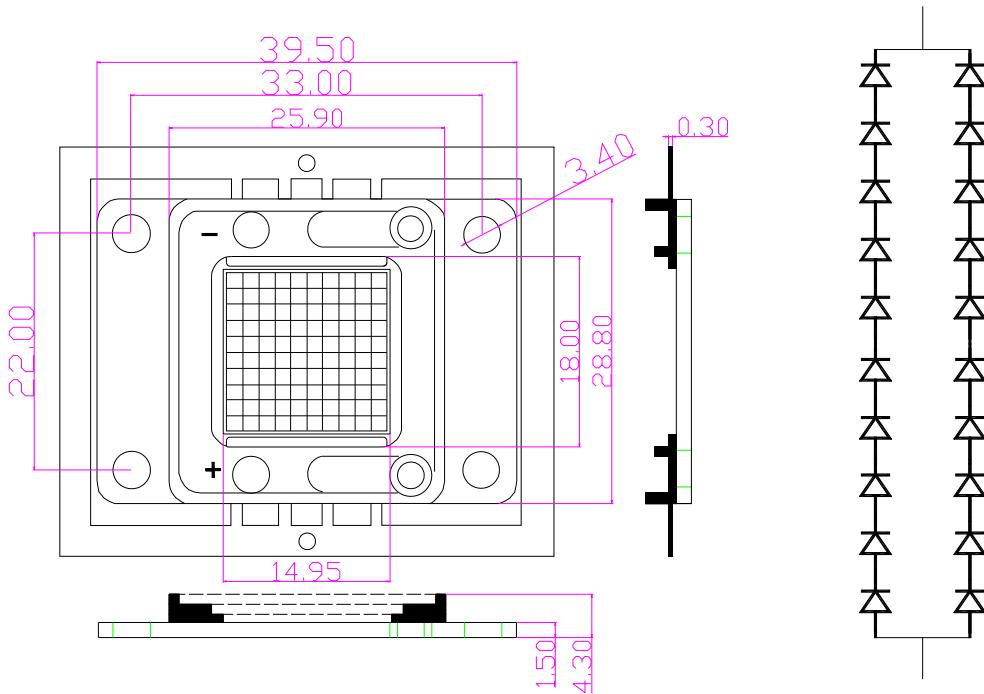

Notes: All dimensions in mm tolerance is  $\pm 0.1\text{mm}$  unless otherwise noted.

## ■ Radiation Diagram

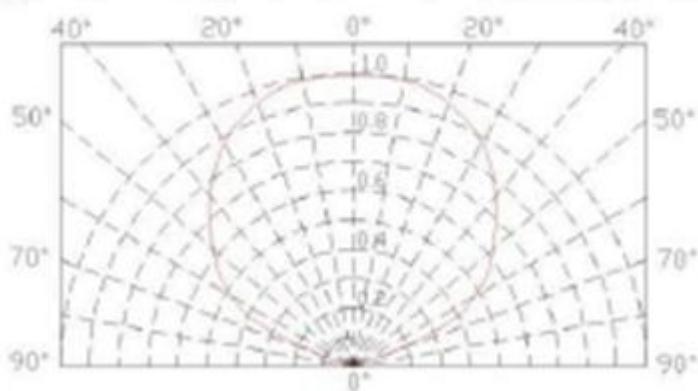

## ■ Absolute Maximum Ratings (Ta=25°C)



| Parameter                   | Symbol           | Rating    | Unit |
|-----------------------------|------------------|-----------|------|
| DC Forward Current          | I <sub>F</sub>   | 700       | mA   |
| Peak pulse Current*         | I <sub>FP</sub>  | 1000      | mA   |
| Reverse Voltage             | V <sub>R</sub>   | 50        | V    |
| Power Dissipation           | P <sub>D</sub>   | 20        | W    |
| Operating Temperature Range | T <sub>OPR</sub> | -30 ~ +75 | °C   |
| Storage Temperature Range   | T <sub>STG</sub> | -40 ~ +85 | °C   |
| LED Junction Temperature    | T <sub>J</sub>   | 125       | °C   |

Notes: 1. 1/10 Duty Cycle 0.1ms Pulse Width.

## ■ Electrical/Optical Characteristics--White (At TA=25°C)

| Parameter                                  | Symbol              | Conditions            | Min   | Avg. | Max   | Units |
|--|---------------------|-----------------------|-------|------|-------|-------|
| Forward Voltage                            | V <sub>F</sub>      | I <sub>F</sub> =700mA | 30.00 | --   | 34.00 | V     |
| Thermal Resistance Junction To Board       | R<θ <sub>J-B</sub>  | I <sub>F</sub> =700mA | --    | 10   | --    | °C/W  |
| Luminous Flux                              | Φv                  | I <sub>F</sub> =700mA | 1800  |      | 2000  | lm    |
| Color Temperature                          | CCT                 | I <sub>F</sub> =700mA | 3000  |      | 3200  | K     |
| CRI  | Ra                  | I <sub>F</sub> =700mA | 60    | --   | 65    | --    |
| Temperature Coefficient of Forward Voltage | ΔV <sub>F</sub> /ΔT | I <sub>F</sub> =700mA | --    | -2   | --    | mV/°C |
| Reverse Current                            | I <sub>R</sub>      | V <sub>R</sub> =50V   | --    | --   | 10    | μA    |
| Viewing Angle <sup>[1]</sup>               | 2θ <sub>1/2</sub>   | I <sub>F</sub> =700mA | --    | 120  | --    | Deg   |

## ■ Color & binning

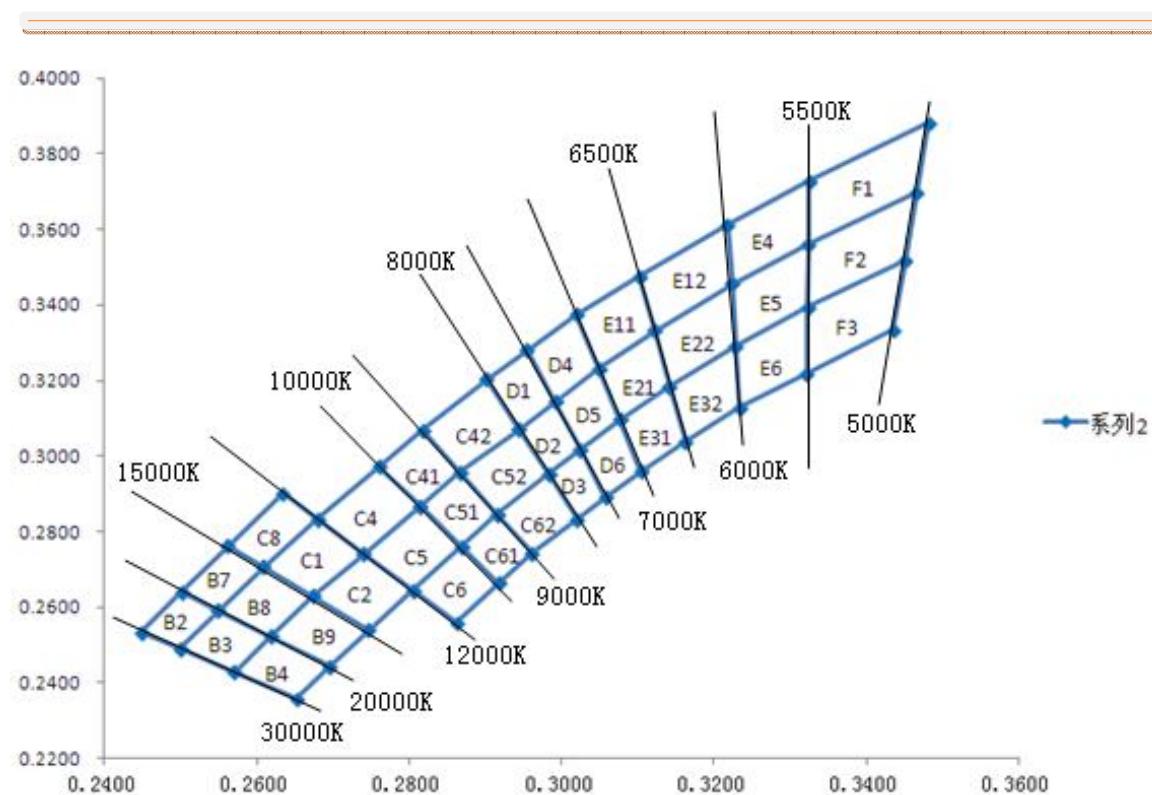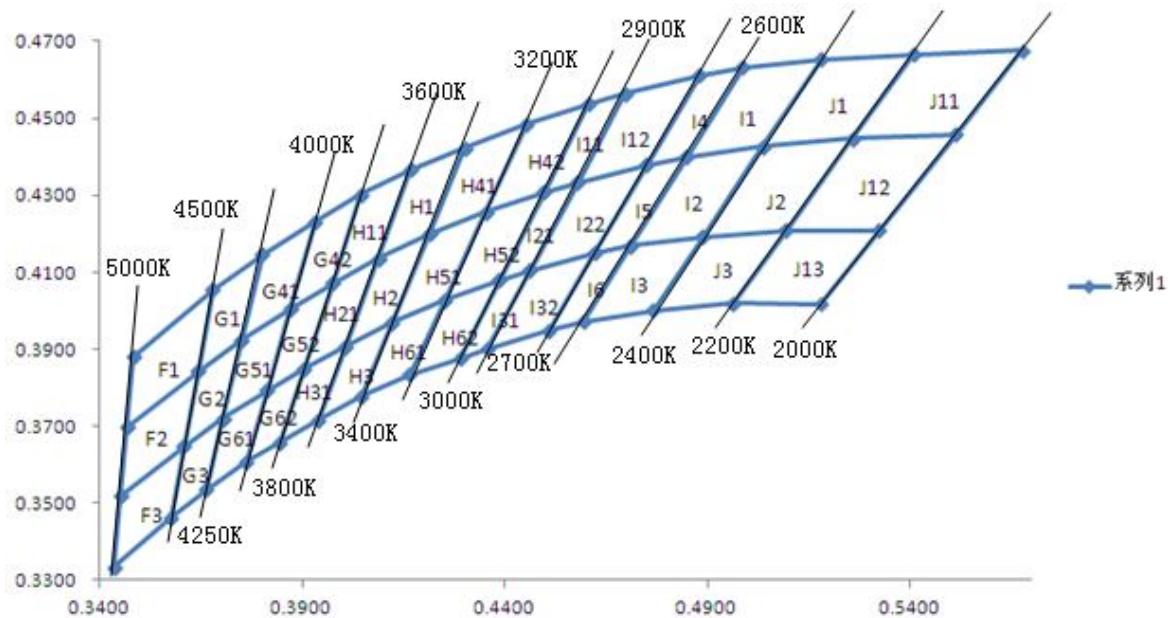

|     |        |        |     |        |        |     |        |        |
|-----|--------|--------|-----|--------|--------|-----|--------|--------|
| J11 | 0.5409 | 0.4666 | J12 | 0.5258 | 0.4447 | J13 | 0.5093 | 0.4209 |
|     | 0.5677 | 0.4675 |     | 0.5513 | 0.4458 |     | 0.5323 | 0.4208 |
|     | 0.5513 | 0.4458 |     | 0.5323 | 0.4208 |     | 0.5179 | 0.4018 |
|     | 0.5258 | 0.4447 |     | 0.5093 | 0.4209 |     | 0.4963 | 0.4020 |
| J1  | 0.5180 | 0.4653 | J2  | 0.5036 | 0.4426 | J3  | 0.4888 | 0.4192 |
|     | 0.5409 | 0.4666 |     | 0.5258 | 0.4447 |     | 0.5093 | 0.4209 |
|     | 0.5258 | 0.4447 |     | 0.5093 | 0.4209 |     | 0.4963 | 0.4020 |
|     | 0.5036 | 0.4426 |     | 0.4888 | 0.4192 |     | 0.4766 | 0.4001 |
| I1  | 0.4988 | 0.4632 | I2  | 0.4849 | 0.4399 | I3  | 0.4711 | 0.4169 |
|     | 0.5180 | 0.4653 |     | 0.5036 | 0.4426 |     | 0.4888 | 0.4192 |
|     | 0.5036 | 0.4426 |     | 0.4888 | 0.4192 |     | 0.4766 | 0.4001 |
|     | 0.4849 | 0.4399 |     | 0.4711 | 0.4169 |     | 0.4593 | 0.3972 |
| I4  | 0.4880 | 0.4611 | I5  | 0.4750 | 0.4379 | I6  | 0.4622 | 0.4150 |
|     | 0.4988 | 0.4632 |     | 0.4849 | 0.4399 |     | 0.4711 | 0.4169 |
|     | 0.4849 | 0.4399 |     | 0.4711 | 0.4169 |     | 0.4593 | 0.3972 |
|     | 0.4750 | 0.4379 |     | 0.4622 | 0.4150 |     | 0.4509 | 0.3948 |
| I12 | 0.4697 | 0.4563 | I22 | 0.4579 | 0.4334 | I32 | 0.4461 | 0.4104 |
|     | 0.4880 | 0.4611 |     | 0.4750 | 0.4379 |     | 0.4622 | 0.4150 |
|     | 0.4750 | 0.4379 |     | 0.4622 | 0.4150 |     | 0.4509 | 0.3948 |
|     | 0.4579 | 0.4334 |     | 0.4461 | 0.4104 |     | 0.4357 | 0.3901 |
| I11 | 0.4605 | 0.4536 | I21 | 0.4496 | 0.4308 | I31 | 0.4386 | 0.4080 |
|     | 0.4697 | 0.4563 |     | 0.4579 | 0.4334 |     | 0.4461 | 0.4104 |
|     | 0.4579 | 0.4334 |     | 0.4461 | 0.4104 |     | 0.4357 | 0.3901 |
|     | 0.4496 | 0.4308 |     | 0.4386 | 0.4080 |     | 0.4289 | 0.3877 |
| H42 | 0.4454 | 0.4484 | H52 | 0.4353 | 0.4257 | H62 | 0.4251 | 0.4028 |
|     | 0.4605 | 0.4536 |     | 0.4496 | 0.4308 |     | 0.4386 | 0.4080 |
|     | 0.4496 | 0.4308 |     | 0.4386 | 0.4080 |     | 0.4289 | 0.3877 |
|     | 0.4353 | 0.4257 |     | 0.4251 | 0.4028 |     | 0.4164 | 0.3834 |
| H41 | 0.4302 | 0.4423 | H51 | 0.4214 | 0.4200 | H61 | 0.4122 | 0.3969 |
|     | 0.4454 | 0.4484 |     | 0.4353 | 0.4257 |     | 0.4251 | 0.4028 |
|     | 0.4353 | 0.4257 |     | 0.4251 | 0.4028 |     | 0.4164 | 0.3834 |
|     | 0.4214 | 0.4200 |     | 0.4122 | 0.3969 |     | 0.4047 | 0.3779 |

|            |        |        |            |        |        |            |        |        |
|------------|--------|--------|------------|--------|--------|------------|--------|--------|
| <b>H1</b>  | 0.4167 | 0.4366 | <b>H2</b>  | 0.4087 | 0.4136 | <b>H3</b>  | 0.4007 | 0.3908 |
|            | 0.4302 | 0.4423 |            | 0.4214 | 0.4200 |            | 0.4122 | 0.3969 |
|            | 0.4214 | 0.4200 |            | 0.4122 | 0.3969 |            | 0.4047 | 0.3779 |
|            | 0.4087 | 0.4136 |            | 0.4007 | 0.3908 |            | 0.3940 | 0.3717 |
| <b>H11</b> | 0.4045 | 0.4301 | <b>H21</b> | 0.3974 | 0.4072 | <b>H31</b> | 0.3904 | 0.3850 |
|            | 0.4167 | 0.4366 |            | 0.4087 | 0.4136 |            | 0.4007 | 0.3908 |
|            | 0.4087 | 0.4136 |            | 0.4007 | 0.3908 |            | 0.3940 | 0.3717 |
|            | 0.3974 | 0.4072 |            | 0.3904 | 0.3850 |            | 0.3845 | 0.3659 |
| <b>G42</b> | 0.3932 | 0.4232 | <b>G52</b> | 0.3870 | 0.4005 | <b>G62</b> | 0.3812 | 0.3793 |
|            | 0.4045 | 0.4301 |            | 0.3974 | 0.4072 |            | 0.3904 | 0.3850 |
|            | 0.3974 | 0.4072 |            | 0.3904 | 0.3850 |            | 0.3845 | 0.3659 |
|            | 0.3870 | 0.4005 |            | 0.3812 | 0.3793 |            | 0.3761 | 0.3608 |
| <b>G41</b> | 0.3800 | 0.4146 | <b>G51</b> | 0.3750 | 0.3923 | <b>G61</b> | 0.3704 | 0.3720 |
|            | 0.3932 | 0.4232 |            | 0.3870 | 0.4005 |            | 0.3812 | 0.3793 |
|            | 0.3870 | 0.4005 |            | 0.3812 | 0.3793 |            | 0.3761 | 0.3608 |
|            | 0.3750 | 0.3923 |            | 0.3704 | 0.3720 |            | 0.3662 | 0.3536 |
| <b>G1</b>  | 0.3679 | 0.4055 | <b>G2</b>  | 0.3642 | 0.3843 | <b>G3</b>  | 0.3608 | 0.3648 |
|            | 0.3800 | 0.4146 |            | 0.3750 | 0.3923 |            | 0.3704 | 0.3720 |
|            | 0.3750 | 0.3923 |            | 0.3704 | 0.3720 |            | 0.3662 | 0.3536 |
|            | 0.3642 | 0.3843 |            | 0.3608 | 0.3648 |            | 0.3576 | 0.3463 |
| <b>F4</b>  | 0.3482 | 0.3881 | <b>F5</b>  | 0.3466 | 0.3698 | <b>F6</b>  | 0.3451 | 0.3519 |
|            | 0.3679 | 0.4055 |            | 0.3642 | 0.3843 |            | 0.3608 | 0.3648 |
|            | 0.3642 | 0.3843 |            | 0.3608 | 0.3648 |            | 0.3576 | 0.3463 |
|            | 0.3466 | 0.3698 |            | 0.3451 | 0.3519 |            | 0.3435 | 0.3335 |






|            |        |        |            |        |        |            |        |        |
|------------|--------|--------|------------|--------|--------|------------|--------|--------|
| <b>F1</b>  | 0.3325 | 0.3728 | <b>F2</b>  | 0.3324 | 0.3560 | <b>F3</b>  | 0.3323 | 0.3394 |
|            | 0.3482 | 0.3881 |            | 0.3466 | 0.3698 |            | 0.3451 | 0.3519 |
|            | 0.3466 | 0.3698 |            | 0.3451 | 0.3519 |            | 0.3435 | 0.3335 |
|            | 0.3324 | 0.3560 |            | 0.3323 | 0.3394 |            | 0.3322 | 0.3219 |
| <b>E4</b>  | 0.3218 | 0.3613 | <b>E5</b>  | 0.3224 | 0.3456 | <b>E6</b>  | 0.3229 | 0.3291 |
|            | 0.3325 | 0.3728 |            | 0.3324 | 0.3560 |            | 0.3323 | 0.3394 |
|            | 0.3324 | 0.3560 |            | 0.3323 | 0.3394 |            | 0.3322 | 0.3219 |
|            | 0.3224 | 0.3456 |            | 0.3229 | 0.3291 |            | 0.3234 | 0.3129 |
| <b>E12</b> | 0.3102 | 0.3475 | <b>E22</b> | 0.3122 | 0.3332 | <b>E32</b> | 0.3142 | 0.3184 |
|            | 0.3218 | 0.3613 |            | 0.3224 | 0.3456 |            | 0.3229 | 0.3291 |

|     |        |        |     |        |        |     |        |        |
|-----|--------|--------|-----|--------|--------|-----|--------|--------|
|     | 0.3224 | 0.3456 |     | 0.3229 | 0.3291 |     | 0.3234 | 0.3129 |
|     | 0.3122 | 0.3332 |     | 0.3142 | 0.3184 |     | 0.3163 | 0.3038 |
| E11 | 0.3020 | 0.3374 | E21 | 0.3049 | 0.3232 | E31 | 0.3077 | 0.3096 |
|     | 0.3102 | 0.3475 |     | 0.3122 | 0.3332 |     | 0.3142 | 0.3184 |
|     | 0.3122 | 0.3332 |     | 0.3142 | 0.3184 |     | 0.3163 | 0.3038 |
|     | 0.3049 | 0.3232 |     | 0.3077 | 0.3096 |     | 0.3104 | 0.2960 |
| D4  | 0.2955 | 0.3281 | D5  | 0.2992 | 0.3143 | D6  | 0.3025 | 0.3018 |
|     | 0.3020 | 0.3374 |     | 0.3049 | 0.3232 |     | 0.3077 | 0.3096 |
|     | 0.3049 | 0.3232 |     | 0.3077 | 0.3096 |     | 0.3104 | 0.2960 |
|     | 0.2992 | 0.3143 |     | 0.3025 | 0.3018 |     | 0.3058 | 0.2892 |

|     |        |        |     |        |        |     |        |        |
|-----|--------|--------|-----|--------|--------|-----|--------|--------|
| D1  | 0.2902 | 0.3203 | D2  | 0.2944 | 0.3070 | D3  | 0.2983 | 0.2952 |
|     | 0.2955 | 0.3281 |     | 0.2992 | 0.3143 |     | 0.3025 | 0.3018 |
|     | 0.2992 | 0.3143 |     | 0.3025 | 0.3018 |     | 0.3058 | 0.2892 |
|     | 0.2944 | 0.3070 |     | 0.2983 | 0.2952 |     | 0.3021 | 0.2833 |
| C42 | 0.2818 | 0.3069 | C52 | 0.2867 | 0.2957 | C62 | 0.2916 | 0.2846 |
|     | 0.2902 | 0.3203 |     | 0.2944 | 0.3070 |     | 0.2983 | 0.2952 |
|     | 0.2944 | 0.3070 |     | 0.2983 | 0.2952 |     | 0.3021 | 0.2833 |
|     | 0.2867 | 0.2957 |     | 0.2916 | 0.2846 |     | 0.2961 | 0.2744 |
| C41 | 0.2761 | 0.2972 | C51 | 0.2815 | 0.2868 | C61 | 0.2869 | 0.2761 |
|     | 0.2818 | 0.3069 |     | 0.2867 | 0.2957 |     | 0.2916 | 0.2846 |
|     | 0.2867 | 0.2957 |     | 0.2916 | 0.2846 |     | 0.2961 | 0.2744 |
|     | 0.2815 | 0.2868 |     | 0.2869 | 0.2761 |     | 0.2918 | 0.2665 |
| C4  | 0.2680 | 0.2833 | C5  | 0.2740 | 0.2742 | C6  | 0.2805 | 0.2645 |
|     | 0.2761 | 0.2972 |     | 0.2815 | 0.2868 |     | 0.2869 | 0.2761 |
|     | 0.2815 | 0.2868 |     | 0.2869 | 0.2761 |     | 0.2918 | 0.2665 |
|     | 0.2740 | 0.2742 |     | 0.2805 | 0.2645 |     | 0.2862 | 0.2559 |
| C8  | 0.2562 | 0.2762 | C1  | 0.2609 | 0.2706 | C2  | 0.2673 | 0.2629 |
|     | 0.2634 | 0.2902 |     | 0.2680 | 0.2833 |     | 0.2740 | 0.2742 |
|     | 0.2680 | 0.2833 |     | 0.2740 | 0.2742 |     | 0.2805 | 0.2645 |
|     | 0.2609 | 0.2706 |     | 0.2673 | 0.2629 |     | 0.2747 | 0.2540 |
| B7  | 0.2502 | 0.2641 | B8  | 0.2549 | 0.2592 | B9  | 0.2618 | 0.2522 |
|     | 0.2562 | 0.2762 |     | 0.2609 | 0.2706 |     | 0.2673 | 0.2629 |
|     | 0.2609 | 0.2706 |     | 0.2673 | 0.2629 |     | 0.2747 | 0.2540 |
|     | 0.2549 | 0.2592 |     | 0.2618 | 0.2522 |     | 0.2696 | 0.2443 |

## ■ Typical Optical/Electrical Characteristics Curves

(Ta=25°C Unless Otherwise Noted )

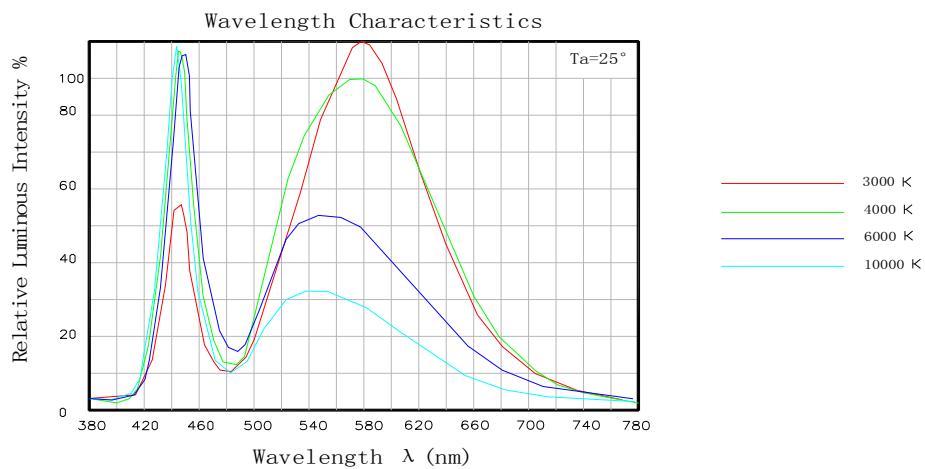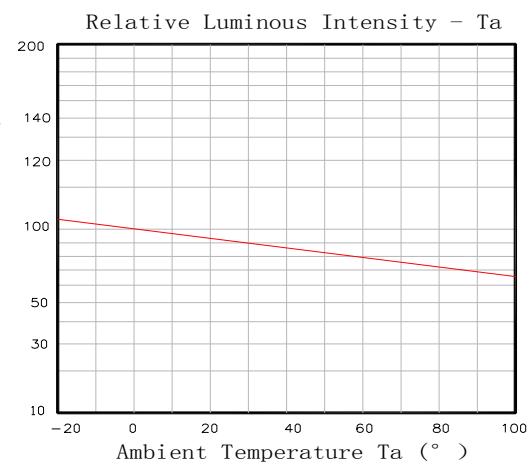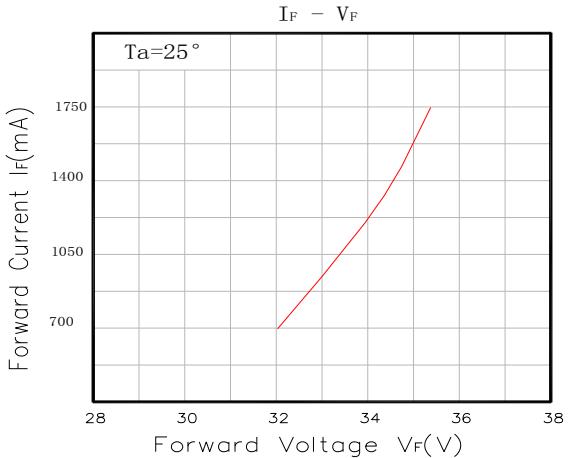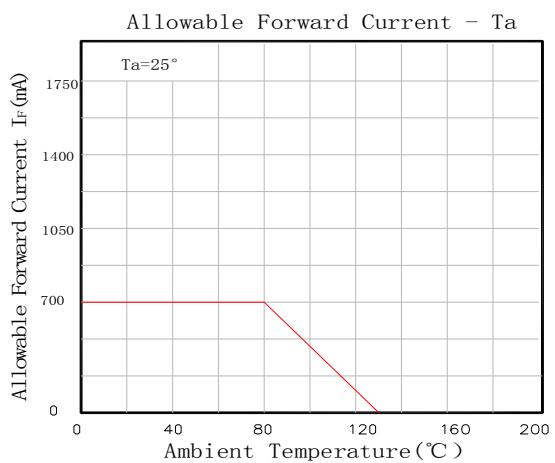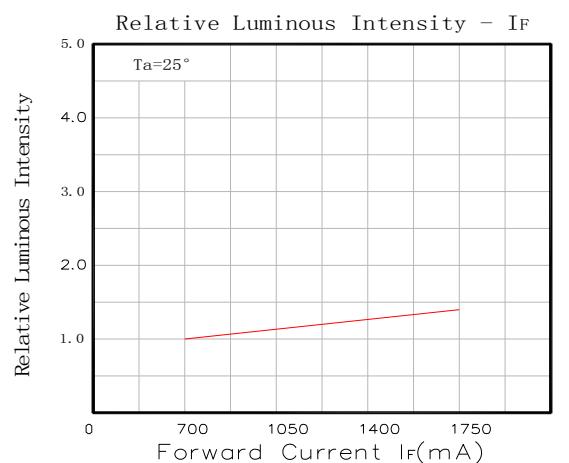

## ■ Reliability test standards

| Type | Test Item                    | REF. Standard            | Test condition                                 | Duration          | Sample count | Accept |
|------|------------------------------|--------------------------|--|-------------------|--------------|--------|
|      | Temperature Cycle            | JESD22-A104-A            | -40°C~25°C~100°C~25°C<br>30min,5min,30min,5min | 100<br>100 cycles | 22           | 0/22   |
|      | Thermal shock                | JESD22-A106              | -40°C~100°C<br>30min, 30min                    | 100<br>100 cycles | 22           | 0/22   |
|      | High Temperature Storage     | JEITA ED-4701<br>200 201 | TA=100°C ± 5°C                                 | 1000 Hrs          | 22           | 0/22   |
|      | Low Temperature Storage      | JEITA ED-4701<br>200 202 | TA=-40°C ± 5°C                                 | 1000 Hrs          | 22           | 0/22   |
|      | Humidity Heat Storage        | JIS C 7021<br>(1977)B-11 | Ta=60°C RH=85%                                 | 1000Hrs           | 22           | 0/22   |
|      | Life test                    | JESD22-A108-A            | Ta=25°C If=700mA                               | 1000Hrs           | 22           | 0/22   |
|      | High humidity Heat life test | JESD22-A101              | Ta=60°C RH=85%<br>If=700mA                     | 1000Hrs           | 22           | 0/22   |
|      | Resistance to soldering Heat | JESD22-A113              | IR soldering 245°C/10sec                       | 1 time            | 20           | 0/22   |

## **Precautions for use**

## 1. Storage

- (1) The best Storage environment: temperature :5°C~30°C , Humidity:40% -80%HR
  - (2) LED store after six months to be re-spectral color separation, to prevent the LED optical properties change

## 2. Production and application

- (1) need wear gloves when contact with led to prevent oxidation
  - (2) ESD protection to be good
  - (3) soldering: the pc type can use soldering iron, (the best temperature is 300°C/3sec) also can use Temperature Platform (150°C/30sec,max) the silicone type can use reflow soldering in addition to soldering iron and Temperature Platform
  - (4) about Package-type silicone , It is recommended to bake before soldering when the pack is unsealed after 24h。The conditions are as following: 80°C 4-6h。
  - (5) must have a good heat sinking, the temperature of the heat sink must be below 65 degree

### 3. Below temp/time

